DOORS




Renson® offers single or double doors in custom made sizes, opening inwards or outwards. In some cases, access behind the continuous louvre system is required, for example to maintain and service (hidden) industrial appliances.

The doors are fitted with locks, pivots, handles and restraining chain upon specification.

DIFFERENCE BETWEEN OVERALL SIZE (0) AND CLEAR DOOR OPENING (C)

Blade t	Blade type:		L.033 / L.033.08		L.033V		L.050 / L.050HF		L.060AC / L.060HF		L.065AL		L.066 / L.075HF	
1) 0 - 0	mm)	single	double	single	double	single	double	single	double	single	double	single	double	
Openin	ng outwards	259,5	399	259,5	399	259,5	399	279,5	439	259,5	399	259,5	399	
Openin	ng inwards	218	-	237	-	238,5	-	275,5	-	246	-	252,5	-	

Blade type:	L.066P		L.0	66V	L.1	.20	L.150ACS		
0 - C (mm)	single	double	single	double	single	double	single	double	
Opening outwards	259,5	399	259,5	399	309,5	499	539,5	959	
Opening inwards	252,5	-	246	-	288	-	365	-	

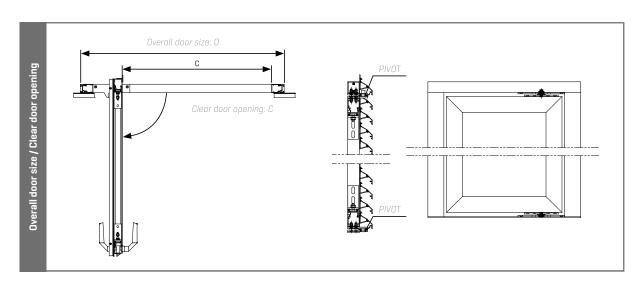



Please note that the actual opening (C) is smaller than the total door size (O) due to the pivoting mechanism. The position of the pivot system will in turn depend on the total load of the louvre door. Renson® can assist you in determining the correct sizes.

HANDLES AND LOCKS

One can choose between none, a single or a double door handle. If you choose not to fit a door handle you can open and close the door with the key to the lock. The handle can be a fixed door knob or a standard handle. It is important to specify the handle type.

The Litto cylinder is the only approved option. Other proposals can be considered if full technical data is provided to Renson®. Other types are available on request.

Accessories such as door dampers, storm chain,... are available on request.



