




MESH

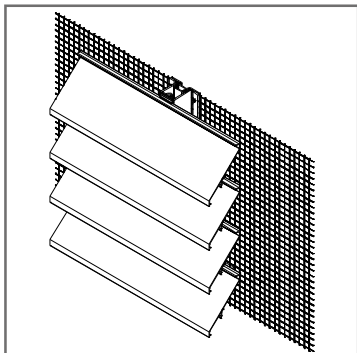

Renson® offers various types of mesh to prevent the entry of insects, birds or vermin behind the continuous louvre system.

1. THE MESH CAN BE RIVETED TO THE REAR OF THE CLS BY MEANS OF A FLAT PROFILE.

Various types mesh of stainless steel 304L of different sizes are available on rolls:

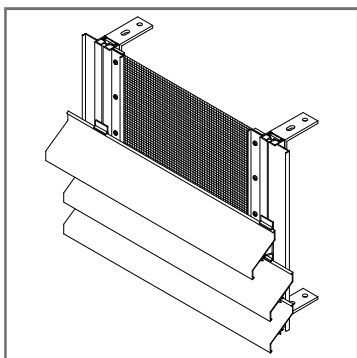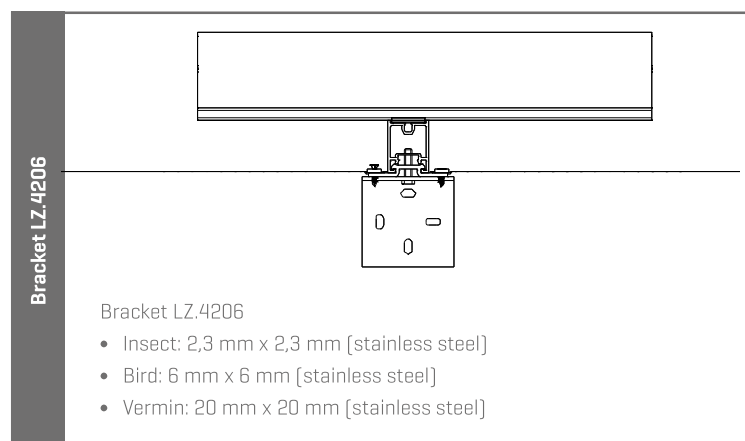

2. SUPPORT LD.0240 FOR LATERAL FIXATION OF MESH

3. LOCKING TOOLS

Due to thermal dilatation, aluminium blades might start moving in the course of time. In order to avoid this, the blades can be locked by means of a locking tool. This tool is available for blades type: L.033.01, L.033CL, L.050HF, L.050CL, L.050W, L.060HF, L.066.01, L.066.06, L.066CL, L.075W, L.075HF and L.120.

4. UNCLIPPING TOOL

If blades are to be removed, the blade removing tool can be used. This blade removing tool is available for L.050.00, L.050HF, L.060HF, L.066.01 and L.075HF.

SILLS

A sill (type LZ.4140) can be fitted in the CL S to drain rain water off.

Fastener for a sill type LZ.4201

Instead of a sill, a frame can be used for the L.075 system [see page 104].

